

# Sonesse 40 io



The acoustic standard for Interior Window Covering market now available in io-homecontrol® technology.

## Compatible end-products



## Product main functionalities



**Designed for silence**



**Remote limit setting**



**Compatible with Solar protection functions**



**"my" favorite**  
Move in one click your blind in your favorite position.



**Thin head**  
Black and thin round head for discreet blending.



**io CONTROLS COMPATIBLE**

## Benefits for professionals

### Easy integration

- Suitable for tubes diameter 37 mm or more (internal diameter)
- Same integration process as current Sonesse 40 range
- Integrated antenna
- Black and thin round head for discreet blending

### Setting from a distance

- Up and down end limits set by remote control
- Easy settings with EMS2
- Easy settings with Set&Go

### Reliability and profitability

- Safe protocol
- Up to connectivity
- Somfy brand awareness and quality

### A wide range

- From 1,3 to 9 Nm

## Benefits for end-user

**A complete smart home offer with interior and exterior bi-directional radio motors !**

### Daily convenience and comfort

- Quiet operation
- Move your blinds effortlessly and remotely thanks to radio control... up to connectivity
- Move in one click your blind to your favorite "my" position

**Access to io-homecontrol® product range for more benefits**

- From control to connectivity

### Discreet integration and home harmony

- Black and thin round head for discreet blending

**SOMFY +**



Quiet operation



**Recommended to use with**  
Silent accessories

**Connected**



CANNEXOON  
The connected equipment



TaHoma®  
The connected home




animeo®  
COMPATIBLE

# Sonesse 40 io




## Technical data


Thermal time	4 minutes at 20°C
Supply	AC
Index protection rating	IP31
Limit switch unit	Electronic
Limit switch capacity	250 turns (limited to 3 minutes of rotation without stop)
Temperature working range	From 0°C to 60°C
Electric insulation	Class II

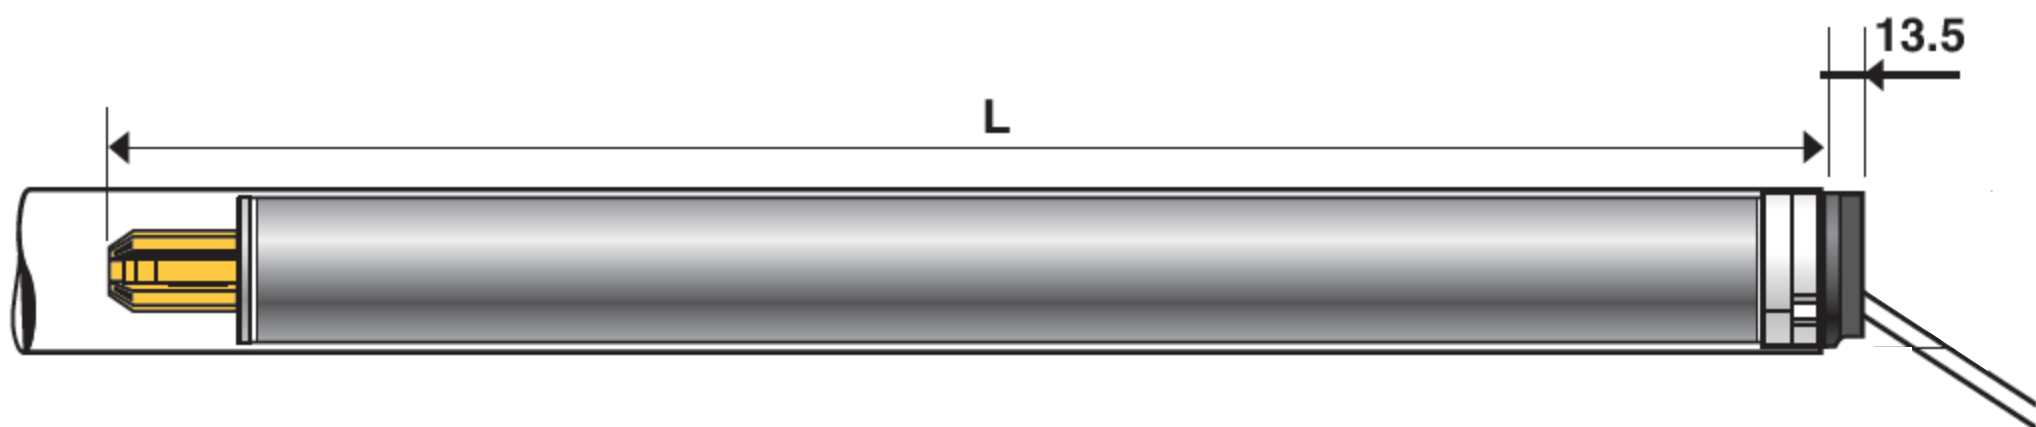

## 230 V

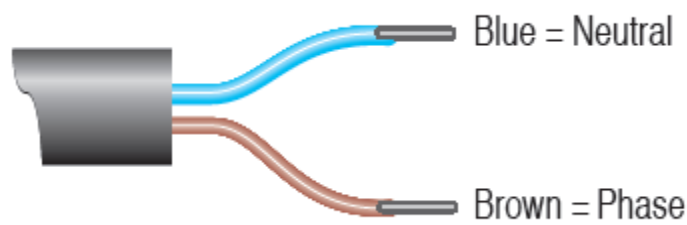

## Round head

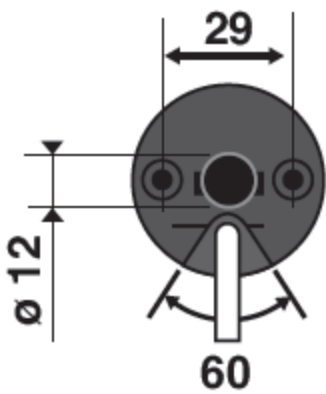

## Performances

Nominal voltage	230 V / 50 Hz			
Torque (Nm)	1,3	3	6	9
Speed (rpm)	50	30	20	12
Radio frequency	868 – 870 MHz			

## Dimensions

L (mm)	535	504	535	535
--------	-----	-----	-----	-----

## Certifications

