



**Somfy +**  
Quiet operation

The new acoustic standard for Interior Window Covering market.

➔ **Recommended to use with**  
Silence accessories

### Compatible end-products



Roller blinds



Roman blinds



Pleated and cellular blinds



Venetian blinds



Projection screens



Zebra blinds

### Product main functionalities



**Designed for silence**



**Progressive limit setting**

Thanks to the progressive adjusting knob on the motor head.



**Thin head**

Black and thin round head for discreet blending.

### Benefits for professionals

#### Easy integration

- Suitable for tubes diameter 37 mm or more (internal diameter)
- Same integration process as LS 40 & Altus 40
- Black and thin round head for discreet blending

#### A wide range

- From 3 to 9 Nm (depending on areas)

### Benefits for end users

#### Simple, effortless and comfort


- Quiet operation
- Move your blinds effortlessly

#### Discreet integration and home harmony

- Black and thin round head for discreet blending

### Technical data

Thermal time	4 min for 120V 5 min for 230V, 100V, 220V
Supply	AC
Index protection rating	IP 44
Limit switch unit	Progressive
Limit switch capacity	40 turns
Temperature working range	0°C to +10°C 1500 cycles +35°C to +60°C 3500 cycles
Electric insulation	Class II - Class I for 120 V and 100 V

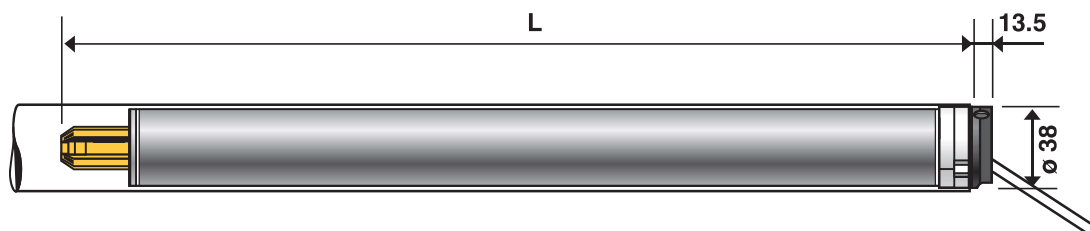

230 V / 220 V	120 V / 100 V	Round head

### Performances

Nominal voltage	230 V / 50 Hz			120 V / 60 Hz			100 V / 50-60 Hz			220 V / 60 Hz		
	3	6	9	4	6	9	3	5	7	3	6	9
Torque (Nm)	3	6	9	4	6	9	3	5	7	3	6	9
Speed (rpm)	30	20	12	36	24	14	30	20	12	36	24	14

### Dimensions

L (mm)	462	494	494	462	494	494	462	494	494	462	494	494

### Certifications

