



A leading player in the housing industry for over 50 years, SOMFY is working to reduce its carbon emissions by 50% by 2030 and like so helps its customers and partners in their environmental approach.

Our actions to reduce our carbon footprint:


OFFER ECO-DESIGNED* PRODUCTS WITH A REDUCED ENVIRONMENTAL IMPACT THROUGHOUT THEIR LIFE CYCLE

OFFER SOLUTIONS THAT IMPROVE THE ENERGY EFFICIENCY OF BUILDINGS AND THUS LIMIT CO2 EMISSIONS.

[1]. Somfy's eco-design approach, identified by the ACT FOR GREEN label, aims to reduce the environmental impact of products throughout their life cycle, from the extraction of raw materials to the end of their life, by placing requirements above current regulations.



— Reference product

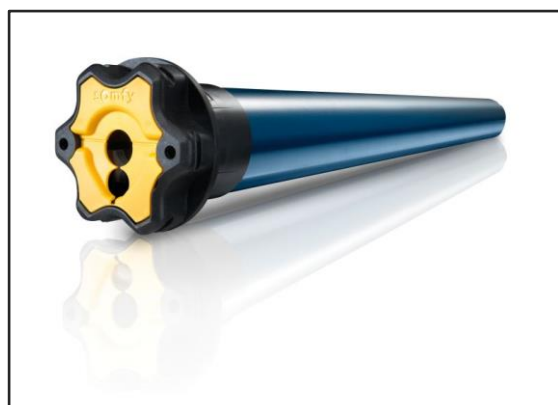

> Reference product

506A2 SONESSE ULTRA 50 RTS 6/24

Réf. **5119326**

> Functional unit

Ensure the closing and opening action by performing 10 000 operating cycles, over a service life of 15 years, with a torque of 6 N.m, on a run of 2 meters, corresponding to 13 winding turns per half-cycle, with a tube diameter of 50 mm

>References covered

5133065	SONESSE ULTRA 50 RTS 6/20	5133109	505A3 SONESSE ULTRA RTS426
5133066	SONESSE ULTRA 50 RTS RH 6/20	5133913	505A3 SONESSE ULTRA RTS426 RH
5119326	506A2 SONESSE ULTRA 50 RTS 6/24	5133069	506A6 SONESSE ULTRA RTS
5119401	506A2 SONESSE ULTRA 50 RTS RH 6/24	5133070	506A6 SONESSE ULTRA RTS RH

— Materials and substances

All useful measures have been adopted to ensure that the materials used in the composition of the product do not contain any substances banned by the legislation in force at the time of marketing.

Plastics		Metals		Other	
	%		%		%
PA66	6.7	Steel	57.1	Glass fiber	2.7
PVC	3.4	Copper	6.5	Paint	1.6
POM	1.7	Zamak	1.1	Lubricant	0.5
ABS	0.7	Bronze	0.7	Other	0.6
PU	0.7	Aluminium	0.4	Total	5.4
Other	2.4	Other	0.8	Packaging	
Total	15.6	Total	66.6	Cardboard	10.0
				Paper	1.6
				PSE	0.9
				Total	12.4
Total mass of the reference product : 3540g					
Estimated recyclable content : 68.9%					

> CHEMICAL SUBSTANCES

The product covered by this PEP comply with REACH regulation and RoHS directive 2011/65/EU, 2015/863 et 201/2102.



— Representativeness

> Data has been collected in October 2023 by our design team, then treated and analyzed in October 2023.

> Data are related to the location of the production and assembly.

> Data matches with previous technology and commercial references only.



— Manufacturing

The devices covered in this PEP are manufactured in France with production that has adopted an environmental management approach.

> Energy model

French mix; 2018



— Distribution

> Packaging is continuously improved by reducing the amount and using a maximum of recycled materials

> The unit pack has been modeled here. It is made up of:

- 100% recycled fiber paper instructions
- cardboard with a minimum of 50% recycled fibers



— Installation

> Installation elements

There is no element included in this phase.

> Installation processes

There is no installation process

> Energy model

Not applicable

> Packaging End of life

100% of cardboard, plastic and paper is landfilled



— Use

For the considered scenario, the product has a power of 114W in active mode during 0.19% of the life cycle, and 0.372W during 99.81% of the life cycle. Measurement in accordance with NF EN 60335 and EN 50564.

> **Energy model of the use phase:** European mix; 2018

> **Consumables and maintenance :** None



— End of life

> Typical transport conditions

Considering the complexity of the electric and electronic recycling channel and our lack of knowledge about the end-of-life processes implemented all around the world, we considered:

- 200 km of transport.
- A waste pretreatment of electrical and electronic equipment, including dismantling and material separation
- A waste incineration of electrical and electronic equipment.
- Loading rate of the truck going to the waste disposal center of 80%.

Product Environmental Profil

Radio motor for curtains or projection screens

Sonesse 50 Ultra RTS



— Environmental impacts —

Evaluation of the environmental impact covers the following life cycle stages: manufacturing, distribution, installation, use and end of life.
All calculations are done with EIME software version EIME© v5.9.3 and CODDE 2022-01, on functional unit with following indicator set :
Indicators for PEF EF 3.0 (Compliance: PEP ed.4, EN15804+A2) v2.0.

Indicators	Units	Global	Manufacturing	Distribution	Installation	Use	End of life	Module D
Resource use, minerals and metals (Abiotic resource depletion – Elements)	kg SB eq.	1.82e-3	1.82e-3	4.08e-8	6.56e-10	2.15e-6	7.09e-9	6.75e-6
Resource use, fossils (Abiotic resource depletion – Fossil fuels)	MJ	1.24e+3	4.71e+2	1.44e+1	2.50e-1	7.57e+2	1.49e+0	1.11e+2
Acidification	mol H+ eq.	3.44e-1	1.36e-1	3.73e-2	1.57e-4	1.69e-1	8.92e-4	7.75e-3
Ecotoxicity, freshwater	CTUe	2.88e+3	2.44e+3	6.99e-1	3.56e+0	3.20e+2	1.16e+2	1.46e+1
Human toxicity, cancer	CTUh	5.40e-6	5.39e-6	1.70e-11	1.19e-11	3.46e-9	1.36e-9	1.13e-6
Human toxicity, non-cancer	CTUh	1.39e-6	1.22e-6	3.34e-9	1.30e-9	1.37e-7	2.72e-8	1.03e-7
Eutrophication, freshwater	kg P eq.	2.30e-4	1.20e-4	3.92e-7	1.21e-6	8.13e-5	2.63e-5	6.34e-6
Eutrophication, marine	kg N eq.	4.75e-2	1.82e-2	8.91e-3	6.93e-4	1.93e-2	4.17e-4	1.46e-3
Eutrophication, terrestrial	mol N eq.	5.85e-1	1.94e-1	9.76e-2	5.49e-4	2.89e-1	3.73e-3	1.46e-2
Climate change - total	kg CO2 eq.	4.94e+1	1.69e+1	1.14e+0	7.18e-1	2.97e+1	9.19e-1	2.46e+0
Climate change - biogenic	kg CO2 eq.	1.92e-1	1.53e-1	0.00e+0	-6.73e-10	3.96e-2	-5.74e-6	5.99e-2
Climate change - fossil	kg CO2 eq.	4.92e+1	1.68e+1	1.14e+0	7.18e-1	2.97e+1	9.19e-1	2.40e+0
Climate change - land use and land transformation	kg CO2 eq.	1.01e-8	1.01e-8	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Ionising radiation, human health	kg U235 eq.	1.83e+2	1.39e+2	2.37e-3	4.92e-4	4.42e+1	7.58e-3	4.33e-2
Land use	No dimension	-4.19e-1	-1.01e+0	0.00e+0	0.00e+0	5.91e-1	0.00e+0	0.00e+0
Ozone depletion	kg CFC-11 eq.	1.31e-6	1.17e-6	1.49e-9	1.61e-9	1.27e-7	4.36e-9	6.02e-8
Particulate matter	Disease occurrence	2.31e-6	7.89e-7	1.98e-7	1.07e-9	1.32e-6	5.44e-9	4.12e-8
Photochemical ozone formation, human health	kg NMVOC eq.	1.49e-1	6.09e-2	2.51e-2	3.39e-4	6.18e-2	9.65e-4	5.03e-3
Water use	m3 eq.	1.93e+1	1.82e+1	3.77e-3	7.11e-4	1.05e+0	1.65e-2	8.91e-1
Total Primary Energy	MJ	1.40e+3	4.77e+2	1.45e+1	2.51e-1	9.02e+2	1.52e+0	1.14e+2
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.48e+2	2.50e+0	1.85e-2	1.38e-3	1.45e+2	2.76e-2	2.37e+0
Use of renewable primary energy resources used as raw material	MJ	3.49e+0	3.49e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Total use of renewable primary energy resources	MJ	1.51e+2	5.99e+0	1.85e-2	1.38e-3	1.45e+2	2.76e-2	2.37e+0
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.23e+3	4.52e+2	1.44e+1	2.50e-1	7.57e+2	1.49e+0	1.11e+2
Use of non renewable primary energy resources used as raw material	MJ	1.84e+1	1.84e+1	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Total use of non-renewable primary energy resources	MJ	1.24e+3	4.71e+2	1.44e+1	2.50e-1	7.57e+2	1.49e+0	1.11e+2
Use of secondary material	kg	7.39e-1	7.39e-1	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Use of renewable secondary fuels	MJ	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Use of non renewable secondary fuels	MJ	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Net use of freshwater	m3	4.49e-1	4.25e-1	8.77e-5	1.66e-5	2.45e-2	3.85e-4	2.08e-2
Non hazardous waste disposed	kg	1.63e+1	8.75e+0	3.49e-2	3.89e-1	4.27e+0	2.86e+0	5.11e+0
Hazardous waste disposed	kg	3.93e+1	3.82e+1	0.00e+0	3.84e-4	5.55e-1	5.16e-1	6.27e-2
Radioactive waste disposed	kg	3.39e-3	2.44e-3	2.43e-5	2.19e-6	8.95e-4	3.35e-5	2.72e-4
Components for reuse	kg	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Materials for recycling	kg	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Materials for energy recovery	kg	2.23e-8	2.23e-8	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Exported Energy	MJ	9.57e-2	9.42e-2	0.00e+0	1.49e-3	0.00e+0	0.00e+0	0.00e+0

Product Environmental Profil

Radio motor for curtains or projection screens

Sonesse 50 Ultra RTS



> Here are the impacts of the B module.

Indicators	Units	Use	B1	B2	B3	B4	B5	B6	B7
Resource use, minerals and metals (Abiotic resource depletion – Elements)	kg SB eq.	2.15e-6	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	2.15e-6	0.00e+0
Resource use, fossils (Abiotic resource depletion – Fossil fuels)	MJ	7.57e+2	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	7.57e+2	0.00e+0
Acidification	mol H+ eq.	1.69e-1	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	1.69e-1	0.00e+0
Ecotoxicity, freshwater	CTUe	3.20e+2	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	3.20e+2	0.00e+0
Human toxicity, cancer	CTUh	3.46e-9	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	3.46e-9	0.00e+0
Human toxicity, non-cancer	CTUh	1.37e-7	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	1.37e-7	0.00e+0
Eutrophication, freshwater	kg P eq.	8.13e-5	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	8.13e-5	0.00e+0
Eutrophication, marine	kg N eq.	1.93e-2	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	1.93e-2	0.00e+0
Eutrophication, terrestrial	mol N eq.	2.89e-1	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	2.89e-1	0.00e+0
Climate change - total	kg CO2 eq.	2.97e+1	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	2.97e+1	0.00e+0
Climate change - biogenic	kg CO2 eq.	3.96e-2	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	3.96e-2	0.00e+0
Climate change - fossil	kg CO2 eq.	2.97e+1	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	2.97e+1	0.00e+0
Climate change - land use and land transformation	kg CO2 eq.	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Ionising radiation, human health	kg U235 eq.	4.42e+1	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	4.42e+1	0.00e+0
Land use	No dimension	5.91e-1	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	5.91e-1	0.00e+0
Ozone depletion	kg CFC-11 eq.	1.27e-7	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	1.27e-7	0.00e+0
Particulate matter	Disease occurrence	1.32e-6	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	1.32e-6	0.00e+0
Photochemical ozone formation, human health	kg NMVOC eq.	6.18e-2	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	6.18e-2	0.00e+0
Water use	m3 eq.	1.05e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	1.05e+0	0.00e+0
Total Primary Energy	MJ	9.02e+2	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	9.02e+2	0.00e+0
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.45e+2	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	1.45e+2	0.00e+0
Use of renewable primary energy resources used as raw material	MJ	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Total use of renewable primary energy resources	MJ	1.45e+2	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	1.45e+2	0.00e+0
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	7.57e+2	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	7.57e+2	0.00e+0
Use of non renewable primary energy resources used as raw material	MJ	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Total use of non-renewable primary energy resources	MJ	7.57e+2	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	7.57e+2	0.00e+0
Use of secondary material	kg	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Use of renewable secondary fuels	MJ	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Use of non renewable secondary fuels	MJ	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Net use of freshwater	m3	2.45e-2	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	2.45e-2	0.00e+0
Non hazardous waste disposed	kg	4.27e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	4.27e+0	0.00e+0
Hazardous waste disposed	kg	5.55e-1	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	5.55e-1	0.00e+0
Radioactive waste disposed	kg	8.95e-4	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	8.95e-4	0.00e+0
Components for reuse	kg	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Materials for recycling	kg	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Materials for energy recovery	kg	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Exported Energy	MJ	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0

> **Biogenic carbon content** : 0,001 kg C. biogenic for the product, 0.117 kg C. biogenic for the packaging.

50, avenue du Nouveau
Monde
74300 Cluses
Tél. 04 50 96 83 79

Product Environmental Profil

Radio motor for curtains or projection screens

Sonesse 50 Ultra RTS



> Those impacts are only applicable to the reference product on page 1.

> Extrapolation rule

For each phase of the life cycle, there is an extrapolation factor. To obtain the impacts of the other product, you need to multiply by the specific extrapolation factor.

	Manufacturing	Distribution	Installation	Use	End of life	Module D	Exemple pour toutes les phases en Changement climatique (kg eq. CO ₂)
SONESSE ULTRA 50 RTS 6/20	1.00	1.00	1.00	1.08	1.00	1.00	5.18E+01
SONESSE ULTRA 50 RTS RH 6/20	1.00	1.00	1.00	1.02	1.00	1.00	4.99E+01
REF : 506A2 SONESSE ULTRA 50 RTS 6/24	1.00	1.00	1.00	1.00	1.00	1.00	4.94E+01
506A2 SONESSE ULTRA 50 RTS RH 6/24	1.00	1.00	1.00	1.00	1.00	1.00	4.94E+01
505A3 SONESSE ULTRA RTS426	1.00	1.00	1.00	0.96	1.00	1.00	4.82E+01
505A3 SONESSE ULTRA RTS426 RH	1.00	1.00	1.00	0.96	1.00	1.00	4.82E+01
506A6 SONESSE ULTRA RTS	1.00	1.00	1.00	1.02	1.00	1.00	4.99E+01
506A6 SONESSE ULTRA RTS RH	1.00	1.00	1.00	1.02	1.00	1.00	4.99E+01

Example:

Take the reference product indicators and multiply them by the coefficient of the desired product.

Indicators 6/24 REF	Units	Global	Manufacturing	Distribution	Installation	Use	End of life	Module D
Climate change - total	kg CO ₂ eq.	4.94e+1	1.69E+01	1.14E+00	7.18E-01	2.97E+01	9.19E-01	2.46E+00

Desired product: 506A6 SONESSE ULTRA RTS

Corresponding extrapolation factors:

	Manufacturing	Distribution	Installation	Use	End of life	Module D
	1.00	1.00	1.00	1.02	1.00	1.00

Corresponding indicators = REF indicators * Desired product extrapolation factors:

Indicators 10/17	Units	Global	Manufacturing	Distribution	Installation	Use	End of life	Module D
Climate change - total	kg CO ₂ eq.	4.99E+01	1.69E+01	1.14E+00	7.18E-01	3.03E+01	9.19E-01	2.46E+00

Registration number : **SOMF-00209-V01.01-EN**

Drafting Rules: PCR-ed4-FR-2021 09 06

Accreditation number: VH48

Complemented by : PSR-0006-ed1.1-FR-2015 10 16

Date of issue: 11-2023

Programme information: www.pep-ecopassport.org

Validity period: 5 years

Independent verification of the declaration and data, in compliance with ISO 14025 : 2010

Internal ☐ External ☒

The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDEMAIN)

PEP are compliant with ISO 14025 environmental declaration type III

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14025: 2010 "Environmental labels and declarations. Type III environmental declarations. »

Somfy contact: Pierre HOGUET, Ecodesign Engineer, pierre.hoguet@somfy.com

